220 VOLT



WATERPLUS

No-Softening Technology - Quick Installation

WATERPLUS

TECHNICAL SPECIFICATIONS

The Waterplus osmotic treatment mobile plant is a handy trolley with stainless steel frame mounted on wheels, equipped with pressurization pumps and special filters for water treatment and electrical cabinet.

1.PRE FILTRAZIONE

Inlet water treatment system with safety micrometric pre-filtration.

2.OSMOTIC TREATMENT

Pressurization electric pump and vessels containing membranes for the production of water with particular chemical-physical specifications, flow rate and pressure.

3.PROTECTION

Additivation of chemical pretreatment protector










INSTALLATION MODE


DIRECT

Installation mode with direct filling of the tanks of the monospaces.
Activation with on/off switch.

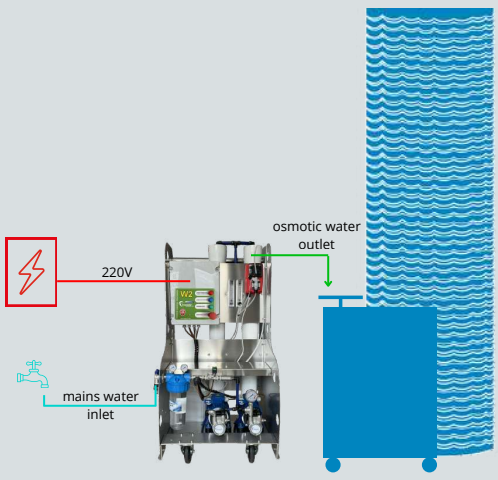

STORAGE - RELAUNCH

Installation mode with storage tanks and utility feed pump.
Activation with automatic float on/off.

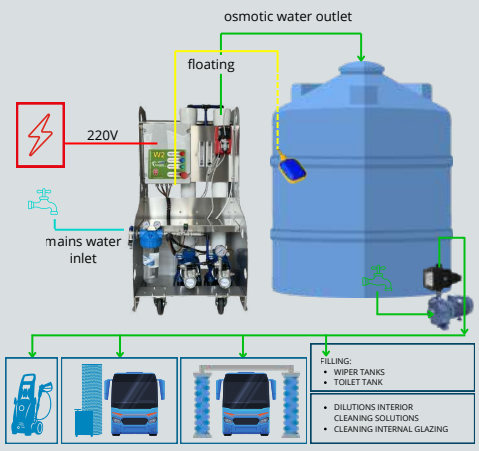

MODELS

W2	W3
220v/380v	220v/380v
Max. production 600l/h	Max. production 900l/h
115 Kg	130 Kg
Misure: 85x68x130h	Misure: 85x68x130h

VANTAGGI

- No need to dry with skins or cloths
- Time saving in cleaning operations
- Super shiny surfaces at the end of drying
- Maintenance reduced to ’80% of technologies used for washing/cleaning operations using water

CONTACT

Registered office and production
Via Enrico De Nicola, 17
85050 Tito (Pz) - Italia
Tel. +0971 62 90 65
Mob. +39 342 57 08 134

www.buggy114.com
info@bugg7114.com

ADDITIVO SPECIALE

BR1

10 Kg

Special osmotic pre-treatment additive.



FILTER MICROMETRIC

5MCR



